



Flange, knockout 5x M25, 6x M25/16, 6x M32/20, HxWxD=116x329x23mm



Powering Business Worldwide™

Part no. **FL4-3**  
 Catalog No. **017236**

EL-Nummer **4132049**  
 (Norway)


**Delivery program**

Product range			xEnergy Safety Ci
Basic function			Basic enclosures
Product function			Accessories for basic enclosures
Accessories			Flanges
Single unit/Complete unit			Modular system
Description			sponge-rubber, captive gasket Quick mounting using wedge-lock fasteners (included as standard)
For use with enclosure dimensions			375 mm
Cable entry			5 x M25, 6 x M25/16, 6 x M32/20

**Technical data ETIM 7.0**

Distribution boards (EG000023) / Gland plate for small distribution boards/switchgear cabinets (EC000211)			
Electric engineering, automation, process control engineering / Electrical installation, device / Electrical distribution system (incl. small distribution board) / Gland plate for small distribution boards/switchgear cabinets (ecl@ss10.0.1-27-14-24-21 [ADI315007])			
Model			Cable screw gland
Type			Straight
Width		mm	329
Height		mm	116
Depth		mm	23
Material			Plastic
Surface protection			Untreated
Degree of protection (NEMA)			Other
Pre-stamping			Yes
Number of connector holes			0
Thread type			Metric
Suitable for nominal thread metric/PG			16 - 32

**Dimensions**

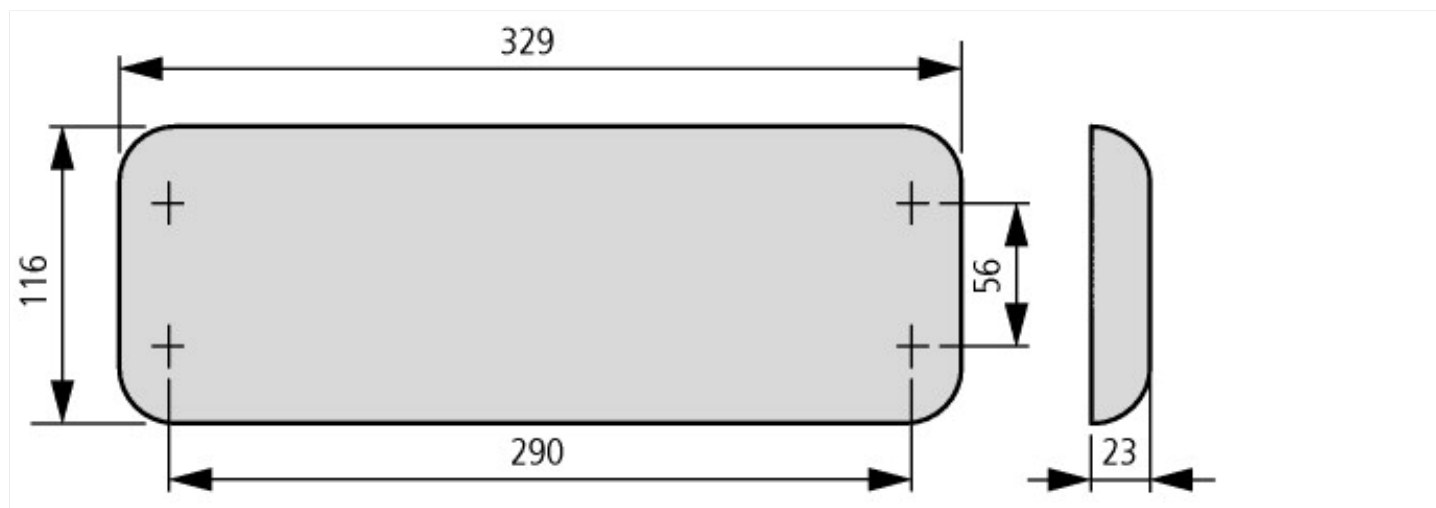

**Additional product information (links)**

allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Renderit http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET\_FILE&amp model certification xEnergy Safety Ci

allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Renderii Save time – we assist you with expert pre-assembly	<a href="http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&amp;">http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&amp;</a>
allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Renderii product information xEnergy Safety Ci	<a href="http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&amp;">http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&amp;</a>
tool for calculating the power loss for switching device combinations	<a href="http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/TCTool/index.htm">http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/TCTool/index.htm</a>
configurator - xEnergy family	<a href="http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/xEnergyMainSupport/index.htm">http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/xEnergyMainSupport/index.htm</a>