




**Phase monitoring relay, multi-function, 2W, 180-280V50/60Hz**

**Part no.** EMR5-AWN280-1-F  
**Catalog No.** 134226  
**Alternate Catalog No.** EMR5-AWN280-1-F  
**EL-Nummer (Norway)** 4110386

**Delivery program**

|                              |       |      |  |
|------------------------------|-------|------|--|
|                              |       |      | This item will continue to be available for a limited time only and is being replaced by the following item: 184770, EMR6-AWN280-D-1   |
| Product range                |       |      | EMR Measuring and monitoring relays  |
| Basic function               |       |      | Phase monitoring relays  |
| Function                     |       |      | Multi-functional   |
|                              |       |      | Power supply from the measuring circuit<br>On-delay/off-delay: none = 0 or adjustable between 0.1 - 30 s<br>Imbalance threshold values adjustable 2 - 25 % of mean value of phase voltages |
| Monitoring voltage per phase | $U_N$ | V AC | 180 - 280 V AC, 50/60 Hz   |
| Monitoring of                |       |      | Phase sequence<br>Phase failure<br>Overvoltage<br>Undervoltage<br>Imbalance<br>Neutral cable break   |
| Threshold value              |       |      | $U_{max}$ 240 - 280 V AC<br>$U_{min}$ 180 - 220 V AC   |
| Adjustable threshold values  |       |      | Overvoltage<br>Undervoltage<br>Imbalance   |
| Contact sequence             |       |      |    |
| Supply voltage               |       |      | 180 - 280 V AC, 50/60 Hz   |
| Width                        |       | mm   | 22.5   |

**Technical data**

**Technical data in sheet catalogue**

|  |  |                         |
|--|--|-------------------------|
| Other technical data (sheet catalogue) |  | Phase monitoring relays |
|--|--|-------------------------|

**Design verification as per IEC/EN 61439**

|  |            |    |  |
|--|------------|----|--|
| Technical data for design verification   |            |    |  |
| Rated operational current for specified heat dissipation   | $I_n$      | A  | 0  |
| Heat dissipation per pole, current-dependent   | $P_{vid}$  | W  | 0  |
| Equipment heat dissipation, current-dependent  | $P_{vid}$  | W  | 0  |
| Static heat dissipation, non-current-dependent   | $P_{vs}$   | W  | 2  |
| Heat dissipation capacity  | $P_{diss}$ | W  | 0  |
| Operating ambient temperature min.   |            | °C | -25  |
| Operating ambient temperature max.   |            | °C | 60   |
| IEC/EN 61439 design verification   |            |    |  |
| 10.2 Strength of materials and parts   |            |    |  |
| 10.2.2 Corrosion resistance  |            |    |  |
| 10.2.2.1 Verification of thermal stability of enclosures   |            |    | Meets the product standard's requirements.                         |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |            |    | Meets the product standard's requirements.                         |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    | Meets the product standard's requirements.                         |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |            |    | Meets the product standard's requirements.                         |
| 10.2.5 Lifting   |            |    | Does not apply, since the entire switchgear needs to be evaluated. |

|  |  |  |
|--|--|--|
| 10.2.6 Mechanical impact                                 |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions                                      |  | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES                  |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances                   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock                   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections        |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors                 |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties                               |  |  |
| 10.9.2 Power-frequency electric strength                 |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage                         |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise                                   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                               |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                      |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## Technical data ETIM 6.0

|  |  |    |                  |
|--|--|----|------------------|
| Relays (EG000019) / Phase monitoring relay (EC001441)  |  |    |                  |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Monitoring equipment (low-voltage switch technology) / Asymmetry monitoring equipment (ec@ss8.1-27-37-18-03 [AKF097011]) |  |    |                  |
| Type of electric connection  |  |    | Screw connection |
| With detachable clamps   |  |    | No               |
| Rated control supply voltage Us at AC 50HZ   |  | V  | 0 - 280          |
| Rated control supply voltage Us at AC 60HZ   |  | V  | 0 - 280          |
| Rated control supply voltage Us at DC  |  | V  | 0 - 0            |
| Voltage type for actuating   |  |    | AC               |
| Phase sequence monitoring  |  |    | Yes              |
| Phase failure monitoring   |  |    | Yes              |
| Function under voltage detection   |  |    | Yes              |
| Function over voltage detection  |  |    | Yes              |
| Phase imbalance monitoring   |  |    | Yes              |
| Voltage measurement range  |  | V  | 0 - 280          |
| Min. adjustable delay-on energization time   |  | s  | 0.1              |
| Max. permitted delay-on energization time  |  | s  | 30               |
| Min. adjustable off-delay time   |  | s  | 0.1              |
| Max. permitted off-delay time  |  | s  | 30               |
| Number of contacts as normally closed contact  |  |    | 0                |
| Number of contacts as normally open contact  |  |    | 0                |
| Number of contacts as change-over contact  |  |    | 2                |
| Width  |  | mm | 22.5             |
| Height   |  | mm | 78               |
| Depth  |  | mm | 100              |


## Approvals

|                             |  |   |
|-----------------------------|--|---|
| Product Standards           |  | IEC 255-6; UL 508; CSA-22.2 No. 14-05; CE marking |
| UL File No.                 |  | E29184  |
| UL Category Control No.     |  | NKCR, NKCR7                                       |
| CSA File No.                |  | UL report valid                                   |
| CSA Class No.               |  | 3211-03   |
| North America Certification |  | UL listed, certified by UL for use in Canada      |
| Degree of Protection        |  | IEC: IP20, UL/CSA Type: -                         |


## Characteristics

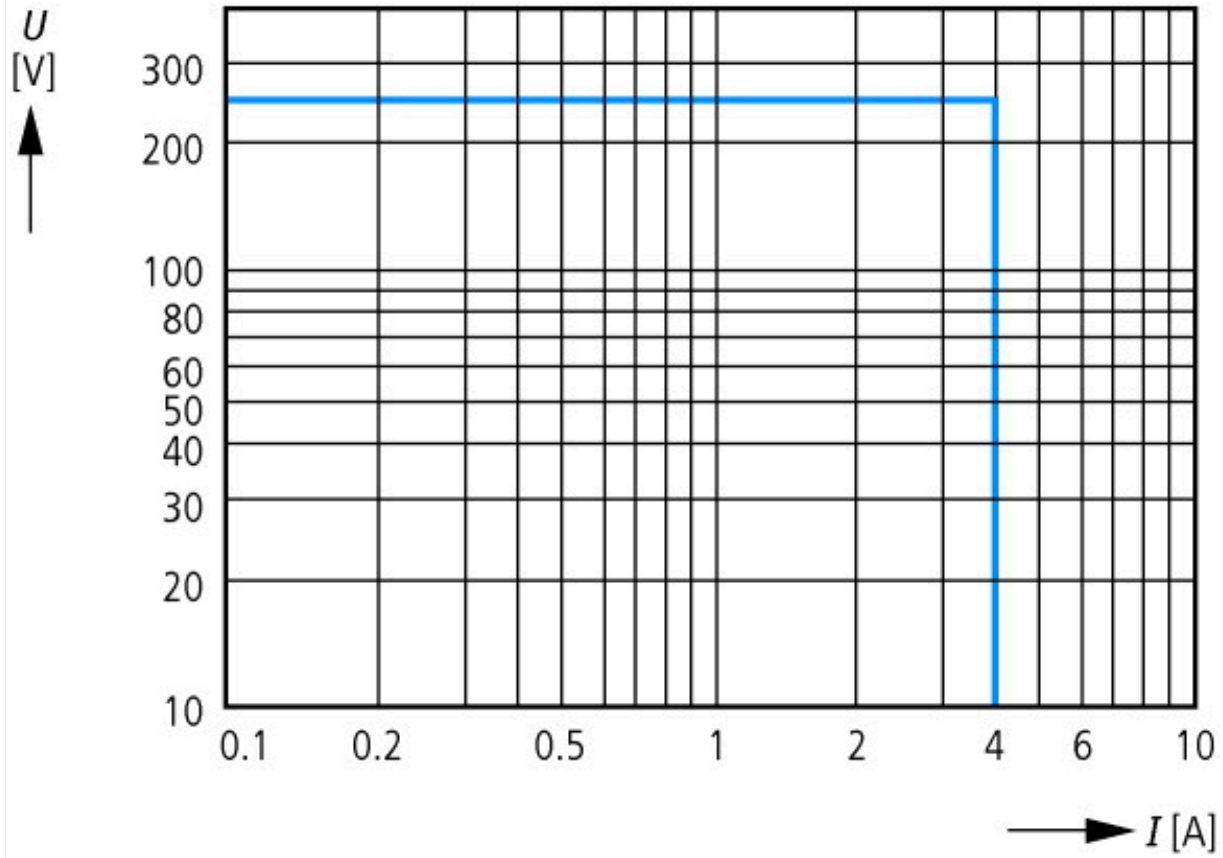


AC load (resistive)

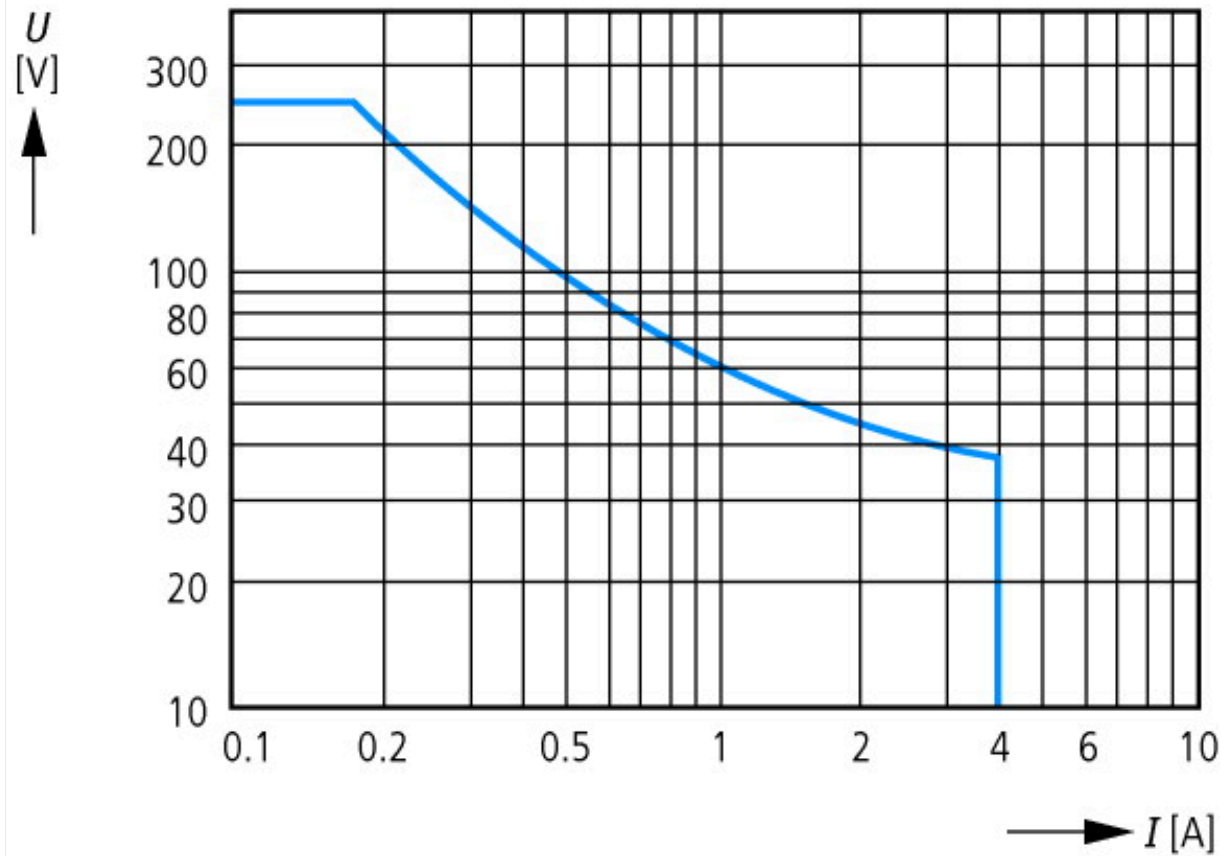

DC load (resistive)

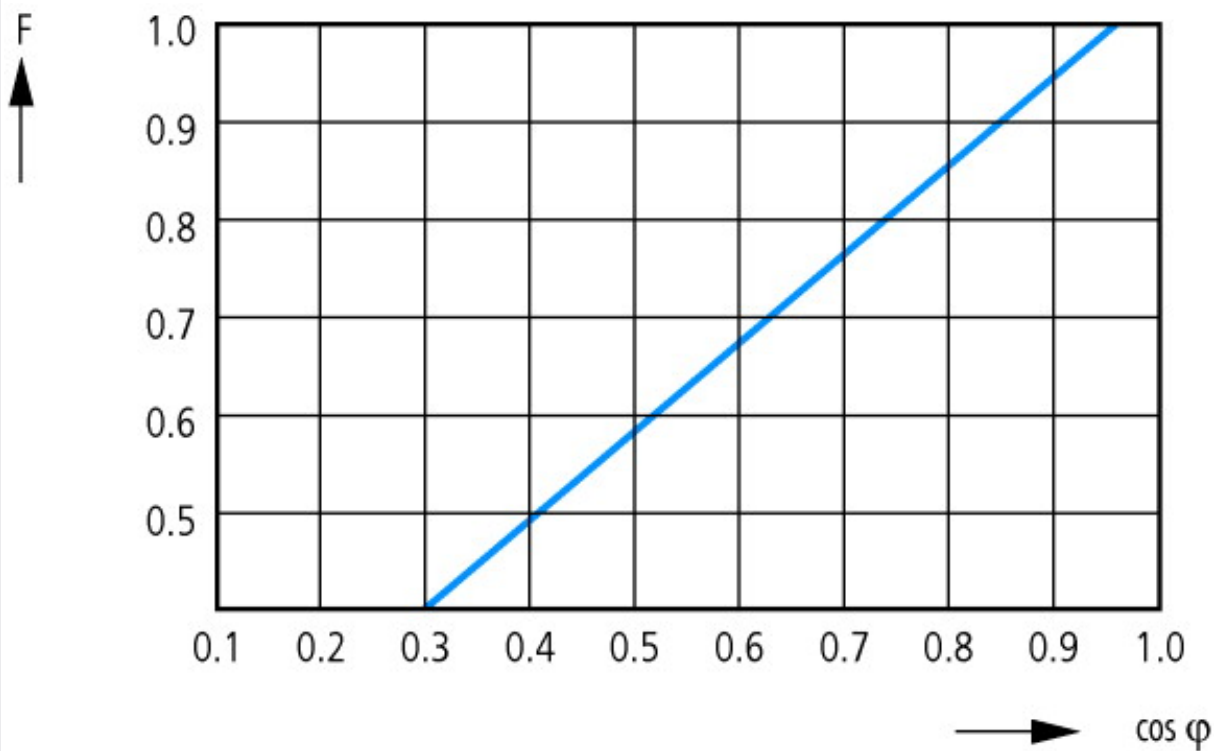


Derating factor  $F$  with inductive AC load

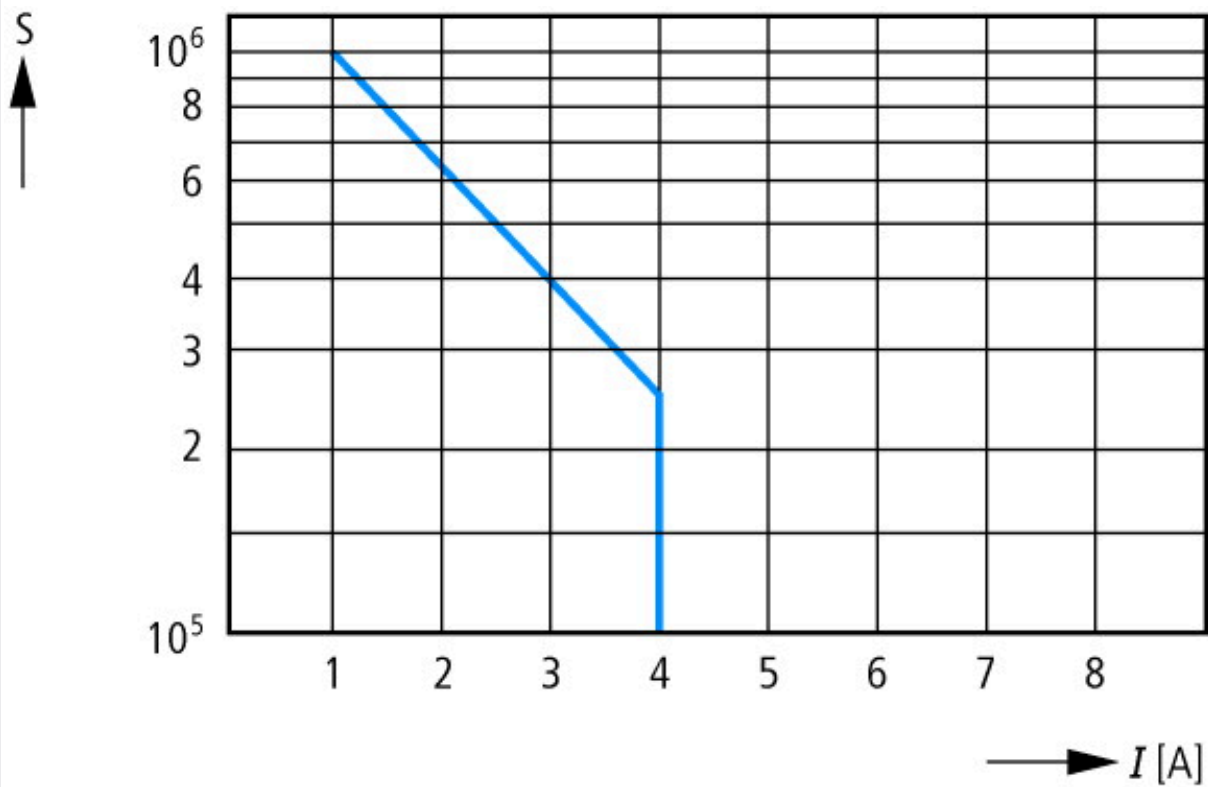

Contact life  
 $S$  operations  
 220 V 50 Hz AC-1  
 360 operations/h

## Dimensions

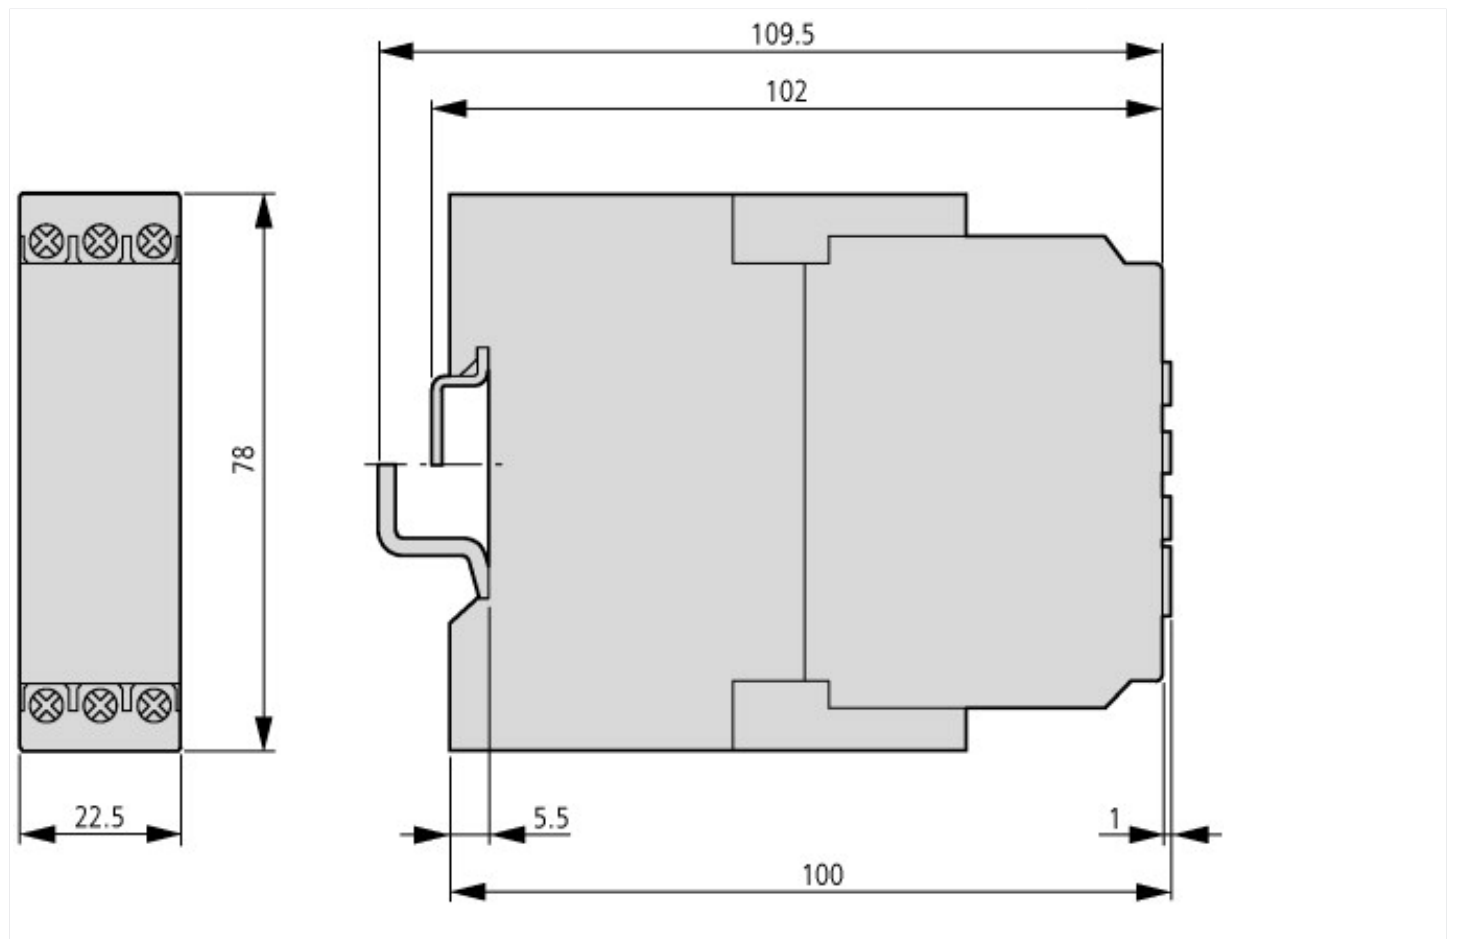

## Additional product information (links)

Phase monitoring relays

<http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=11.37>